



**THOMAS E. FERGUSON**  
 AUDITOR OF STATE  
 COLUMBUS, OHIO 43216

DEPUTY AUDITORS:

JAMES A. BOLDEN  
 Administration

RICHARD G. NUSS  
 CPA  
 Auditing Division

RUSSELL ROUCH  
 Management Advising  
 Service


CERTIFICATION

I, Thomas Aquinas Burke, Supervisor, Land Office of the Auditor of State, duly authorized to perform the duties of the Auditor of State prescribed in Section 115.21 of the Ohio Revised Code, hereby certifies that the enclosed field notes and plats are true copies taken from records in our office. These plats and field notes are for the following townships in the United States Military District:

1. Range 4, Townships 8, 9 and 10
  2. Range 5, Townships 8, 9, and 10
  3. Range 6, Townships 8, 9, and 10
  4. Range 7, Townships 8, 9, and 10
  5. Range 8, Townships 8 and 9
  6. Range 9, Townships 8 and 9
- and in the Ohio River Survey
1. Range 11, Townships 14 and 15
  2. Range 12, Townships 14 and 15
  3. Range 13, Townships 13 and 14
  4. Range 14, Townships 17 and 18
  5. Range 15, Townships 19 and 20

Witness my hand and seal of the Office of the Auditor of State, at Columbus, Ohio, this Twentieth-Nine day of November in the year of Our Lord Nineteen Hundred and Eighty-Three (1983).

Thomas Aquinas Burke  
 Supervisor  
 State Land Office

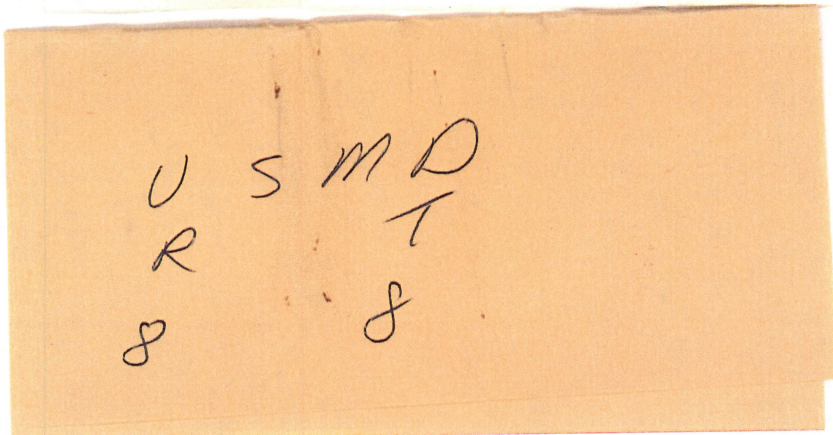

North boundary of Township 0<sup>th</sup> Range 0<sup>th</sup>

August 19<sup>th</sup> 1897

from a post set for the Northeast corner of 30 N 0 of N West corner of 30 N 7 and described in the field Notes there of thence run West —

West  
6<sup>th</sup>  
00 20  
19 34  
35 35  
73 06  
75 43  
00 00

5<sup>th</sup> Mile West

a gully from nearly West along the line to the east —  
an *Aspen* tree 7 inches diameter in the line  
a Run 2<sup>th</sup> wide from N to S  
a Run 3<sup>rd</sup> do — do — N to S  
a white Oak 20 inches diameter  
just an Iron Wood post where a Maple 15 inches diameter bears S 49° 30' W 26<sup>th</sup> of an Hickory 8 inches diameter bears N 42° 10' E 10<sup>th</sup> — Single steep hills good soil, in places with timber N & S Oak Hickory dogwood & some butternut —

2<sup>nd</sup> Mile West —

6<sup>th</sup>  
12 22  
35 54  
43 70  
00 —

a Run 30<sup>th</sup> wide from N to S bottom 10 chains wide  
a white Oak 24 inches diameter in the line —  
a white Oak 23 inches diameter  
just an iron wood post where a white Oak 20 inches diameter bears N 01° W 11<sup>th</sup> of a one other white Oak 21 inches diameter bears S 11° W 34<sup>th</sup> — to 50 chains steep hills except the bottom on the creek — to 75<sup>th</sup> level then descend — flat on the hills with land timber black & B & W Oak 6<sup>th</sup> but not Maple Hickory &c —

Continued

3<sup>rd</sup> Mile West

- 6<sup>th</sup> 4164 a run 3 fms wide from NW to SE
- 044 over the North point of a rock 20 feet high
- 121 a Spring bursts from the foot of a rock 50 fms to left
- 20195 Hickory 6 inches diameter
- 30195 gully from NW to SE
- 40 Iron wood post corner of sections 1 & 2 T<sub>10</sub> N<sub>20</sub> E of sec 3 & 4 P<sub>20</sub> T<sub>9</sub> where a chestnut 14 inches diameter bears N<sub>75</sub> W 29 fms marked Range P<sub>20</sub> T<sub>9</sub> S 3 and a white Oak 3 inches diameter bears N<sub>6</sub> E 6 fms marked P<sub>20</sub> T<sub>9</sub> S 4 and marked the other sections per plan
- 51167 a Chestnut 19 inches diameter
- 50150 a white Oak 23 inches diameter
- 00100 part an Iron wood post where a sugar tree 10 inches diameter bears S<sub>66</sub>° 30' W 22 fms and a maple 8 inches diameter bears S<sub>26</sub>° 30' E 17 fms - the first 1/4 of this mile hills steep & stone the remainder bridges flat good soil timber N<sub>2</sub> of B Oak Hickory Chestnut Maple & Larch - some prairie

4<sup>th</sup> Mile West

- 6<sup>th</sup> 7172 a white Oak 15 inches diameter in the line
- 10125 a run 3 fms wide from NW to SE
- 20137 a Run 0 fms wide from NW to SE
- 47130 a white Oak 36 inches diameter in the line
- 53150 a Run 3 fms wide from SE to NW
- 60116 white Oak 10 inches diameter
- 64149 Chestnut 18 inches diameter
- 71129 B Oak 26 inches diameter
- 70170 an Apple 17 inches diameter
- 00 a dogwood post B O 22 inches diameter S<sub>24</sub>° 15' E 17 fms of a chestnut 10 inches diameter bears N<sub>2</sub>° 15' W 40 fms hills

North boundary of Township 0<sup>th</sup> Range 0<sup>th</sup> cont

4<sup>th</sup> Mile continued

hills high & steep soil middling good stony in places  
timber white Oak & black Oak, hickory dogwood  
Aspen in places

August 14<sup>th</sup> 1797 quit for the day -

August 20<sup>th</sup> begun where we quit last night

5<sup>th</sup> Mile West

West

4.01

an Aspen 16 inches diameter in the line -

20.67

a run 2<sup>th</sup>s from NE to SW

34.50

a white Oak 17 inches diameter

53.36

do ——— 16 do ———

60.79

a run 0<sup>th</sup>s wide course SE

61.63

land level a run comes from the North west bottom  
of level land upon it about 10 chains cedar brush  
and cold land

76.10

a white Oak 10 inches diameter

00.00

just a white Oak post where a NO 10 inches diameter  
bears N 46° E marked NO 29 13 of one other white  
Oak 9 inches diameter bears S 55° E marked  
NO 30 12 - hills high & steep soil ordinary  
timber small B & P Oak

West boundary

August 20<sup>th</sup> begun at the Northwest corner  
of Swan Range & North east corner of SON 9  
where we quit last night and run South

1<sup>st</sup> Mile South

South

26.17

a white Oak 12 inches diameter

49.50

a white Oak 20 inches in level land common

West boundary of Township 8<sup>th</sup> Range 0<sup>th</sup> Cont

South

1<sup>st</sup> Mile South cont

6<sup>th</sup>  
69.22  
70.95  
72--  
00.

a stream 40<sup>th</sup>s runs from N to E plenty of water  
a white Oak 12 inches diameter in the line  
to foot of hills  
put a dogwood post where a white Oak 15 inches dia  
bears N 54° 15 E 62<sup>th</sup>s of a black Oak 8 inches diameter  
N 63° W 37<sup>th</sup>s - the flat on the large run has been a  
timber covered with Hazel Alder & plum & bushes part  
of it appears poor the other middling - to the right there  
is an opening like a prairie

2<sup>nd</sup> Mile South

6<sup>th</sup>  
76.94  
00.00

a white Oak tree 24 inches diameter in the line  
put a post where a white Oak 10 inches diameter  
bears N 72° 15 E 01<sup>th</sup>s of a black Oak 12 inches diameter  
bears S 50° 30 E 47<sup>th</sup>s very high hills steep rocky & poor  
timber principally dead some flat on the tops of the  
hills pretty good land

3<sup>rd</sup> Mile South

6<sup>th</sup>  
81.57  
30.69  
36.70  
40--  
77.22

a white Oak 17 inches diameter in the line  
a " " " " " " " "  
a Spring runs from NW to SE  
put a post corner to sections N 2 & 3 T 8 R 8 and  
of sections N 1 & 4 T 8 R 9 and a white Oak 20 inches dia  
bears N 64° E 27<sup>th</sup>s marked R 8<sup>th</sup> T 8 S 13 of a white Oak  
14 inches diameter bears N 74° W 50<sup>th</sup>s marked R 9 T 8  
S 11 and marked the sections for plain  
gully from NW to SE

00-00

West boundary of Township 0<sup>th</sup> Range 0<sup>th</sup> cont.

South  
00.00

3<sup>rd</sup> Mile South cont

just a post where a white Oak 15 inches diameter bears N 70 E 16 fms and one other white Oak 12 inches diameter bears N 61 W 3 fms - Noisy poor barren hills bushy and scarcely any timber country on both sides of the line appears the same

4<sup>th</sup> Mile South

24.93  
34.34  
00.00

a Run 3 fms wide from W to E -  
a white Oak 12<sup>in</sup> diameter  
just an oak stake no tree to take the bearing of - the first 3/4 of this mile very bushy little timber hilly and very rocky last 1/4 waste all bush best free from stones very good soil -

5<sup>th</sup> Mile South

6.30  
20.00

over a large Rock -  
quit for the day August 21<sup>st</sup> 1797 -  
August 22<sup>nd</sup> began when we quit for the day last night

50.00

a Run 35 fms wide from S 30 W to N 30 E has water sufficient for a mill and runs bushy flat land about 15 chains to the west of the run cold bushy Prairie and grass in places -

74.63  
00.00

a white Oak 13 inches diameter  
just a white Oak post corner of Townships 7 & 8 Range 8 & 9 of Township 7 & 8 Range <sup>(7<sup>th</sup>)</sup> where a poplar 10 inches diameter bears N 37 30 E 22 fms of a white Oak 10 inches diameter bears S 60 30 E 40 fms marked with the sections for plan - bushy and of the same description as 5<sup>th</sup> 3/4 of last mile except the level on the run -

2<sup>d</sup> Section N<sup>o</sup>. 2  
Acres - 4000

2<sup>d</sup> Section N<sup>o</sup>. 1 -  
Land - 3995,50  
Navigable Water - 4,50  
Total - 4000,00

2<sup>d</sup> Section N<sup>o</sup>. 3  
Acres - 4000

2<sup>d</sup> Section N<sup>o</sup>. 4  
Land - 4126,90  
Navigable water - 12,50  
Total - 4139,40

TOWNSHIP N<sup>o</sup>. VIII. RANGE N<sup>o</sup>. VIII.

Scale of Fifty Chains to an Inch