



THOMAS E. FERGUSON
AUDITOR OF STATE
COLUMBUS, OHIO 43216

DEPUTY AUDITORS:

JAMES A. BOLDEN
Administration

RICHARD G. NUSS
CPA
Auditing Division

RUSSELL ROUCH
Management Advising
Service

CERTIFICATION

I, Thomas Aquinas Burke, Supervisor, Land Office of the Auditor of State, duly authorized to perform the duties of the Auditor of State prescribed in Section 115.21 of the Ohio Revised Code, hereby certifies that the enclosed field notes and plats are true copies taken from records in our office. These plats and field notes are for the following townships in the United States Military District:


1. Range 4, Townships 8, 9 and 10
2. Range 5, Townships 8, 9, and 10
3. Range 6, Townships 8, 9, and 10
4. Range 7, Townships 8, 9, and 10
5. Range 8, Townships 8 and 9
6. Range 9, Townships 8 and 9

and in the Ohio River Survey

1. Range 11, Townships 14 and 15
2. Range 12, Townships 14 and 15
3. Range 13, Townships 13 and 14
4. Range 14, Townships 17 and 18
5. Range 15, Townships 19 and 20

Witness my hand and seal of the Office of the Auditor of State, at Columbus, Ohio, this Twentieth-Nine day of November in the year of Our Lord Nineteen Hundred and Eighty-Three (1983).

Thomas Aquinas Burke
Supervisor
State Land Office

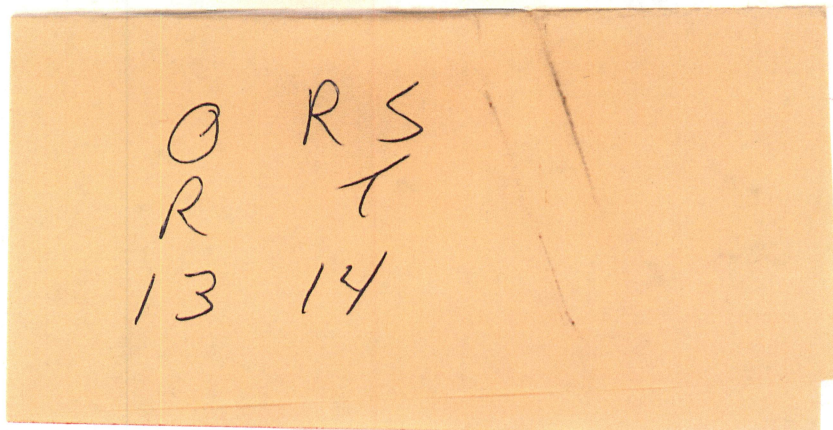

Between T. 14 & 15, R. 13.

Chs. Sts

M. C. Sta

6:09:00

Intersect the Range Line, 90 links South
of the T. Corner.

West 1st Mile West, on True Line between
T. 14 & 15, R. 13.

40:00 Move temporary $\frac{1}{2}$ mile Post East, from
which a W. Oak, 14 ins. diam. bears
N. 71 E. 10 links; and an Ash, 7 ins.
diam. bears S. 74 W. 9 lks. distant.

62:50 A W. Oak, 16 inches diameter.

80:00 Move temporary Mile Post East, from
which a W. Oak, 12 ins. diam. bears
S. 34 E. 11 links; and a Maple, 20 ins.
diam. bears N. 12 W. 20 links distant.
This mile level; Timber, W. Oak and
Black Oak.

West 2^d Mile West.

13:50 A Chestnut, 50 inches diameter.

40:00 Move temporary $\frac{1}{2}$ mile Post East,
from which an Ash, 6 ins. diam. bears
S. 26 E. 9 links; and a Hickory, 4 ins.
diam. bears N. 62 E. 6 links distant.

69:25 A W. Oak, 15 inches diameter.

80:00 Move temporary Mile Post East, from
which a Maple, 9 ins. diam. bears
N. 20 E. 5 links; and a Chestnut, 20 ins.
diam. bears South 10 links distant.
This mile level; Timber, Oak & Chestnut.

West 3^d Mile West.

25:75 A W. Oak, 10 inches diameter.

31:50 A Run, 9 links wide, runs South.

40:00 Move $\frac{1}{2}$ mile Post East, from which a

Between T. 14 & 15, R. 13.

Chs. Lks.

W. Oak, 20 ins. diam. bears N. 71 E. 23 links; and a B. Oak, 30 ins. diam. bears S. 3 W. 30 links distant.

80.00 Move temporary Mile Post East, from which a W. Oak, 15 ins. diam. bears N. 74 E. 23 links; and a W. Oak, 14 ins. diam. bears N. 61 W. 9 links distant. This mile rough Barrens; Timber, Oak.

West 4th Mile West.

10.00 A Run, 8 links wide, runs N. 60 W.

19.00 A Run, 2 links wide, runs N. 20 W.

21.95 A W. Oak, 12 inches diameter.

40.00 Move temporary $\frac{1}{2}$ mile Post East, from which a Hickory, 10 ins. diam. bears North 11 links; and a Dogwood, 5 ins. diam. bears S. 13 W. 6 links distant.

59.75 A B. Oak, 30 inches diameter.

80.00 Move temporary Mile Post East, from which a W. Oak, 12 ins. diam. bears N. 33 E. 28 links; and a Plum tree, 3 ins. diam. bears N. 15 E. 10 links distant. This mile ridgy-White Oak land.

West 5th Mile West.

16.65 A W. Oak, 20 inches diameter.

40.00 Move temporary $\frac{1}{2}$ mile Post East, from which a B. Oak, 15 ins. diam. bears N. 9 E. 28 links; and a W. Oak, 12 ins. diam. bears S. 63 W. 45 lks. distant.

63.50 A Creek, 50 links wide, runs South.

80.00 Move temporary Mile Post East, from which a B. Oak, 20 ins. diam. bears N. 74 E. 28 links; and an Ash, 15

Between T. 18 & 19, R. 14.

Chs. Lks.

ins. diam. bears S. 37 W. 5 Mts. distant.
This mile Prairies and Plum Bottom.

West 6th Mile West.

- 1.50 A Creek, 50 links wide, runs N. 45 W.
15.00 A Creek, 50 links wide, runs S. 20 W.
40.00 Move temporary $\frac{1}{2}$ mile Post East in
a Bushy Swamp; no trees to witness.
42.50 A Wet Prairie.
89.00 The Corner on the Range Line.
This mile Bottom; Crook-trees, Plum-trees,
Bushy, Swampy and Wet Prairie.

Monday, 10th Nov. - Started at the S. E.
Corner of T. 19, R. 14. - Thence

West On Random Line, between T. 18 & T. 19, R. 14.
5.58.75 ^{M. C. Lks.} Intersect the Range Line, 80 links North
of T. Corner.

East 1st Mile East - On True Line between T.
18 & 19, R. 14.

- 18.75 Move temporary $\frac{1}{2}$ mile Post to true line,
from which a B. Oak, 15 ins. diam.
bears N. 67 E. 15 links; and a W. Oak, 10
ins. diam. bears S. 61 W. 33 Mts. distant.
26.01 A W. Oak, 15 inches diameter.
35.60 A Run, 9 links wide, runs North.
58.75 Move temporary mile Post to true line,
from which a B. Oak, 12 ins. diam.
bears S. 44 E. 131 links; and a W. Oak, 10
ins. diam. bears S. 76 E. 130 Mts. distant.
This mile Barrens, with some scrub
by Oaks.

Between T. 18 & 19, R. 14.

Chs. & Ss.	
East	2 ^d Mile East.
40.00	Move temporary $\frac{1}{2}$ mile Post to true line in Prairie; no trees to witness.
80.00	Move temporary Mile Post to true line, from which a W. Oak, 9 ins. diam. bears N. 77 W. 112 links; and a W. Oak, 12 ins. diam. bears N. 31 W. 110 lks. distant.
	This mile Prairies and Barrens.
East	3 ^d Mile East.
40.00	Move temporary $\frac{1}{2}$ mile Post to true line in Prairie; no trees to witness.
80.00	Move temporary Mile Post to true line, from which a W. Oak, 20 ins. diam. bears N. 33 E. 113 links; and a W. Oak, 12 ins. diam. bears S. 85 E. 124 lks. distant.
	This mile over Prairies and Barrens.
East	4 th Mile East.
40.00	Move temporary $\frac{1}{2}$ mile Post to true line, from which a W. Oak, 20 ins. diam. bears S. 88 E. 85 links; and a W. Oak, 12 ins. diam. bears N. 64 E. 83 links distant.
80.00	Move temporary Mile Post to true line, from which a W. Oak, 20 ins. diam. bears S. 70 E. 61 lks; and a W. Oak, 12 ins. diam. bears S. 59 E. 39 links distant.
	This mile over barren Ridges.
East	5 th Mile East.
40.00	Move temporary $\frac{1}{2}$ mile Post to true line in Barrens; no trees to witness.
80.00	Move temporary Mile Post to true line, from which a R. Oak, 10 ins. diam.

Between T. 14, R. 13, & T. 18, R. 14.

Chs. - ks.

bears N. 78 E. 37 liks; and a W. Oak, 9
ins. diam. bears N. 20 W. 14 Ms. distant.
This mile over barren ridges, with a few
Scrubby Oaks.

East 6th Mile East.

40.00 Move temporary 1/2 mile Post to true line
in Prairie; no trees to witness.

44.60 A Run, 12 liks wide, runs S. 50 E.

80.00 The Corner on Range Line.

This mile Prairie and Barrens; a few
Scrubby Oaks.

Tuesday, 11th. - Continued the Range line
South, between T. 14 & 18, R. 13 & 14.

South 1st Mile South.

2.00 A Prairie.

24.00 A Run, 10 liks wide, runs East.

40.00 Set up 1/2 mile Post in the Prairie; no
trees to witness.

80.00 Set up Mile Post in Prairie; no trees
to witness.

South 2^d Mile South.

17.50 A Run, 5 liks wide, runs S. 50 E.

40.00 Set up 1/2 mile Post in a Barshy Swamp,
from which an Elm, 12 ins. diam. bears
N. 11 E. 15 Ms.; and a Willow, 4 ins. diam.
bears S. 21 E. 10 liks distant.

80.00 Set up Mile Post in Prairie; no trees
to witness.

South 3^d Mile South.

14.25 A Run, 12 liks wide, runs East at the

Between T. 14, R. 13, and T. 18, R. 14.

Chs. Lks.

side of the Prairie.

40.00 Set up $\frac{1}{2}$ mile Post, from which a W. Oak, 20 ins. diam. bears N. 31 E. 26 Lks; and a W. Oak, 20 ins. diam. bears S. 66 E. 13 links distant.

76.75 A W. Oak, 12 inches diameter.

80.00 Set up Mile Post, from which a B. Oak 20 ins. diam. bears N. 22 E. 28 Lks; and a W. Oak, 16 ins. diam. bears S. 106.54 links distant.

Last part of this mile small Ridges; Timber, W. Oak, B. Oak.

South 4th Mile South.

36.60 A W. Oak, 23 inches diameter.

39.00 A Water Course, 5 links wide, runs East.

40.00 A Gum in the line, 4 ins. diam. from which a W. Oak, 30 ins. diam. bears N. 106.28 links; and a Dogwood, 8 ins. diam. bears N. 34 W. 13 links distant.

55.30 A W. Oak, 19 inches diameter.

69.90 A W. Oak, 25 inches diameter.

80.00 Set up Mile Post, from which a Hickory 20 ins. diam. bears N. 51 W. 7 Lks; and a Hickory, 15 ins. diam. bears S. 106.17 Lks. distant.

This mile level, rich soil; Timber, Oak, Hickory, Gum, Maple.

South 5th Mile South.

20.70 A Run, 2 links, runs East.

21.80 A W. Oak, 20 inches diameter.

32.00 A Water Course, 3 links wide, runs East.

40.00 Set up $\frac{1}{2}$ mile Post, from which a Maple,

Between T. 17 & 18, R. 14.

Chs. Lks.

- 26 ins. diam. bears S. 30 E. 20 lks; and a Hickory, 6 ins. diam. bears S. 41 W. 25 links distant.
- 47.07 An Indian Path leads N. 60 W.
- 56.15 A W. Oak, 30 inches diameter.
- 72.00 A Water Course, 3 links wide, runs East.
- 80.00 Set up Mile Post, from which a Chestnut, 10 ins. diam. bears S. 26 W. 17 lks; and a W. Oak, 6 ins. diam. bears N. 44 W. 18 links distant.
- This mile over Ridges; Timber, Oak and Dogwood.
- South 6th Mile South.
- 26.20 A Run, 7 links wide, runs East.
- 37.75 A W. Oak, 30 inches diameter.
- 40.00 Set up 1/2 mile Post, from which a W. Oak, 15 ins. diam. bears N. 16 E. 27 links; and a W. Oak, 12 ins. diam. bears N. 73 E. 14 links distant.
- 70.00 A Run, 5 links wide, runs N. 45 E.
- 80.57 Set up Mile Post, from which a W. Oak, 10 ins. diam. bears S. 21 W. 9 lks; and a W. Oak, 12 ins. diam. bears N. 15 W. 19 links distant. 9.57 lks. West of 6 mile Post.
- This mile over Ridges; Timber, chiefly White Oak.
- Wednesday, 12th Nov. - Started at the S. E. Corner of T. 18, R. 14 - Thence West On Random Line between T. 17 & 18, R. 14.
- 5.60.15 Intersect the Range Line, 9 links north of the corner of T. 20, R. 15.

Between T. 17 & 18, R. 14

Mts. Mks.

- East 1st Mile East on True Line between
T. 17 & 18, R. 14.
- 20.15 Move temporary $\frac{1}{2}$ Post to true line, from
which a W. Oak, 15 ins. diam. bears S. 26
E. 40 links; and a B. Oak, 5 ins. diam. bears
N. 15 W. 50 links distant.
- 60.15 Move temporary Mile Post to true line,
from which a B. Oak, 7 ins. diam. bears
N. 52 E. 57 links; and a B. Oak, 6 ins.
diam. bears N. 42 E. 65 links distant.
This mile over rough Barrens.
- East 2^d Mile East.
- 37.00 A Water Course, 4 Mks. wide, runs N. 45 E.
- 40.00 Move temporary $\frac{1}{2}$ mile Post to true line,
from which an Elm, 4 ins. diam. bears
N. 65 W. 7 links; and a W. Oak, 24 ins.
diam. bears S. 65 E. 25 links distant.
- 53.00 A Run, 5 links wide, runs North.
- 80.00 Move temporary Mile Post to true line,
from which a B. Oak, 15 ins. diam.
bears N. 32 W. 21 Mks; and a Maple, 12
ins. diam. bears S. 32 E. 44 Mks. distant.
This mile over rough Barrens, with a few
Scrubby Oaks.
- East 3^d Mile East.
- 10.00 A Run, 4 links wide, runs North.
- 40.00 Move temporary $\frac{1}{2}$ mile Post to true line
in the Barrens; no trees to witness.
- 80.00 Move temporary Mile Post to true line in
the Barrens; no trees to witness.
This mile rough brushy Barrens.

Between T. 17 & 18, R. 14.

Chs. Sta.

East 4th Mile East.40.00 A Hickory, 4 ins. diam., from which a Gum,
9 ins. diam. bears S. 53 E. 27 lbs; and a
Gum, 7 ins. diam. bears S. 27 E. 35 lbs. distant.

60.00 A Run, 3 links wide, runs N. 20 E.

80.00 A Maple, 12 ins. diam. in the line.
This mile Barrens.East 5th Mile East.

21.23 A W. Oak, 10 inches diameter.

40.00 Move temporary 1/2 mile Post to true line;
from which a W. Oak, 34 ins. diam. bears
N. 24 E. 40 lbs; and a W. Oak, 12 ins.
diam. bears S. 33 W. 24 links distant.

61.25 A W. Oak, 12 inches diameter.

80.00 Move temporary Mile Post to true line,
from which a B. Oak, 30 ins. diam.
bears N. 80 W. 13 links; and an Elm, 12
ins. diam. bears S. 84 W. 29 lbs. distant.
This mile over small Ridges; Timber, Oak
and Hickory.East 6th Mile East.

25.00 A W. Oak, 15 inches diameter.

33.00 A Water Course, 6 lbs, runs North.

40.00 A Maple, 5 ins. diam. from which a W. Oak,
30 ins. diam. bears N. 11 E. 22 lbs; and a
B. Oak, 30 ins. diam. bears S. 70 E. 23
links distant.

80.00 The corner on the Range Line.

This mile over small Ridges; Timber,
W. Oak and B. Oak.

Between T. 13, R. 13, and T. 17, R. 14.

Chs. Lks.

Monday, 13th - Continued the Range South between T. 13 & 17, R. 13 & 14.

South 1st Mile South.

- 1.65 A Run, 5 links wide, runs East.
- 17.50 A Maple, 12 inches diameter.
- 30.80 A W. Oak, 20 inches diameter.
- 40.00 Set up 1/2 mile Post, from which a W. Oak, 30 ins. diam. bears S. 50 E. 27 Ms.; and an Ash, 6 ins. diam. bears S. 71 W. 11 links distant.
- 68.00 A Hickory, 14 inches diameter.
- 80.00 Corner on a W. Oak, 50 inches diameter. This mile Small Ridges; Timber, Oak and Hickory.

South 2^d Mile South.

- 32.50 A W. Oak, 15 inches diameter.
- 40.00 Set up 1/2 mile Post, from which a W. Oak, 15 ins. diam. bears N. 52 W. 34 links; and a W. Oak, 12 ins. diam. bears S. 61 W. 30 links distant.
- 61.25 A W. Oak, 16 inches diameter.
- 80.00 Set up Mile Post, from which a W. Oak, 20 ins. diam. bears N. 55 W. 27 links; and a W. Oak, 13 ins. diam. bears S. 77 E. 15 links distant. This mile Ridges; Timber chiefly W. Oak.

South 3^d Mile South.

- 23.60 A Run, 7 lks. wide, runs East.
- 31.00 A Run, 2 lks. wide, runs N. 40 E.
- 31.70 A Maple, 12 inches diameter.
- 40.00 Corner on a W. Oak, 9 inches diameter, in the line.

Between T. 13, R. 13, and T. 17, R. 14.

Obs. Lks.

80.00 Cornered on an Elm, 8 inches diameter in
the line.

This mile over Ridges; Timber, W. Oak.

South 4th Mile South.

7.30 Intersect the Old Indian Boundary.
Set up Post, from which an Ironwood,
10 ins. diam. bears N. 83 W. 12 links; and
an Ash, 8 ins. diam. bears N. 86 E. 27
links distant. Between R. 13 and R. 14.

Surveyed by
Thomas Clayton,
Deputy Surveyor.