



THOMAS E. FERGUSON
AUDITOR OF STATE
COLUMBUS, OHIO 43216

DEPUTY AUDITORS:

JAMES A. BOLDEN
Administration

RICHARD G. NUSS
CPA
Auditing Division

RUSSELL ROUCH
Management Advising
Service

CERTIFICATION

I, Thomas Aquinas Burke, Supervisor, Land Office of the Auditor of State, duly authorized to perform the duties of the Auditor of State prescribed in Section 115.21 of the Ohio Revised Code, hereby certifies that the enclosed field notes and plats are true copies taken from records in our office. These plats and field notes are for the following townships in the United States Military District:


1. Range 4, Townships 8, 9 and 10
2. Range 5, Townships 8, 9, and 10
3. Range 6, Townships 8, 9, and 10
4. Range 7, Townships 8, 9, and 10
5. Range 8, Townships 8 and 9
6. Range 9, Townships 8 and 9

and in the Ohio River Survey

1. Range 11, Townships 14 and 15
2. Range 12, Townships 14 and 15
3. Range 13, Townships 13 and 14
4. Range 14, Townships 17 and 18
5. Range 15, Townships 19 and 20

Witness my hand and seal of the Office of the Auditor of State, at Columbus, Ohio, this Twentieth-Nine day of November in the year of Our Lord Nineteen Hundred and Eighty-Three (1983).

Thomas Aquinas Burke
Supervisor
State Land Office

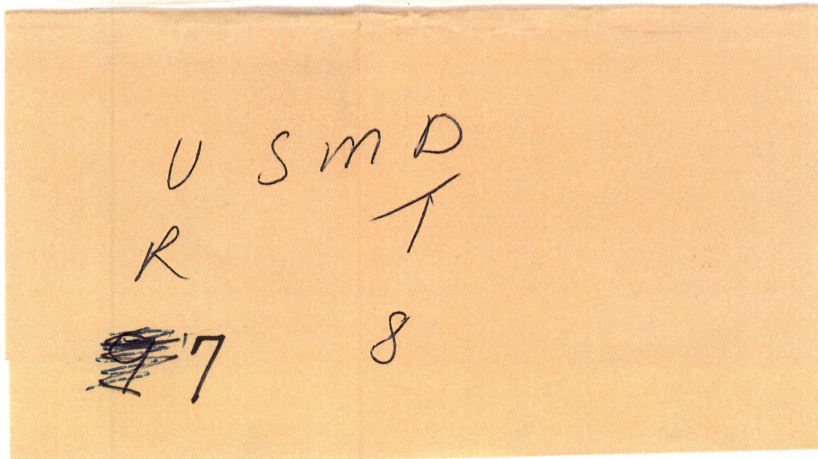

Ch. Sta.

Tuesday, September 27, 1803.

Set post at the South East corner of Township 8, Range 7, where the South Boundary of the Township intersects the Range line, (which is 90 links South of the Five Mile post, but the old marks and numbers are at the intersection), from which post a Hickory 20 ins. diam., bears N 40 W, 13 links distant, and a Hickory 12 ins. diam., bears S 42 W, 18 links distant - Thence run

North, on East Boundary of Section 21.

16.40 Over bottom, to creek, 60 links wide - Course S 40 W.

22.50 Across bottom.

80.00 Set post corner of Sections 20 and 21, from which an Elm 20 ins. diam., bears N 46 E, 7 links distant, and an Elm 40 ins. diam., bears N 60 W, 41 links distant.

From bottom, ridge land - Middleling soil - Timber, Oak, Hickory, Dogwood, and some Spice, undergrowth.

West, on South Boundary of Section 21.

21.20 A Spring run - Course N. W.

40.00 Set post corner of half Sections 41 and 42, from which a Lymn 18 ins. diam., bears N 13 W, 32 links distant, and a Lymn 12 ins. diam., bears South, 9 links distant.

54.50 A creek 60 links wide - Course S. W. Gentle current.

68.50 A brook 12 links wide - Course South.

74.75 Old bearing trees.

80.00 Set post corner of Sections 21 and 22, from which a Beech 12 ins. diam., bears N 47 W, 18 links distant, and a Sugar 22 ins. diam., bears S 41 E, 23 links distant.

This mile, Creek bottom - Good meadow land. Timber, Cherry, Maple, Hickory &c. Saw and some Spice undergrowth.

North, between Sections 21 and 22.

10.50 A Lymn 14 ins. diam.

13.25 A brook 4 links wide - Course S. E. Across bottom.

42.20 A W. Oak 40 ins. diam.

Ch^s M^s

52.00 A brook 4 links wide - Course East.

78.63 A W. Oak 32 ins. diam.

80.00 Set post corner of Sections 19, 20, 21, 22, from which a W. Oak 12 ins. diam. bears West, 18 links distant, and a W. Oak 30 ins. diam. bears N 80 E, 37 links distant.

This mile, the ridge land, thin soil - Timber, W. Oak and some Maple - Stony soil.

West, between Sections 19 and 22.

23.00 A brook 4 links wide - Course South East.

40.00 Set Temporary half Section post.

40.00 A drain - Course S. E.

80.00 Set temporary post.

This mile, ridge land - Timber, mostly Oak - Some Hickory - Dogwood, Ironwood and Beech undergrowth - Soil thin and some stony.

West, on South Boundary of Section 22.

8.00 Across bottom.

23.70 A brook 6 links wide - Course S 20 E.

40.00 Set post corner of half Sections 43 and 44, from which a Maple 14 ins. diam. bears N 52 W, 35 links distant, and a Beech 10 ins. diam. bears N 55 E, 23 links distant.

55.00 A brook 10 links wide - Course South.

74.75 Old bearing trees.

80.00 Set post corner of Sections 22 and 23, from which a W. Oak 24 ins. diam. bears N 57 W, 44 links distant, and a W. Oak 24 ins. diam. bears N 59 E, 70 links distant.

This mile, ridge land - Middleling soil - Timber, Oak, Beech and Hickory - Dogwood undergrowth - Woods open - and the ridges rise gradually.

North, between Sections 22 and 23.

5.70 A B. Oak, 14 ins. diam.

31.94 A Maple 20 ins. diam.

34.00 A rocky drain - Course S. E.

Ch. 11A

- 44.64 A Maple 18 ins. diam.
- 66.10 A brook 3 links wide - Course S. E.
- 66.97 A B. Oak 12 ins. diam.
- 75.22 A W. Oak 14 ins. diam.
- 79.56 Intersected East and West random line, 60 links East of post.
- 80.00 Set post corner of Sections 18, 19, 22, 23, from which a W. Oak 12 ins. diam. bears S 42 $\frac{1}{2}$ E, 14 links distant, and a W. Oak 30 ins. diam. bears S 86 W, 35 links distant.
- This mile, open ridges - Timber, Oak, some Maple and Hickory. Soil some stony and indifferent - Dogwood undergrowth - Quit for the day, sick, September 27, 1803.

West, on South Boundary of Section 23.

- 21.00 A rocky gully - Course S 20 E.
- 25.15 A rocky run, 3 links wide - Course S. E.
- 35.52 Old Section corner.
- 40.00 Set post corner of Half Sections 45 and 46, from which a Beech 24 ins. diam. bears N 14 W, 14 links distant, and a W. Oak 36 ins. diam. bears N 89 E, 53 links distant.
- 41.00 A drain - Course South.
- 75.85 Old bearing trees for mile post.
- 80.00 Set post corner of Sections 23 and 24, from which a W. Oak 36 ins. diam. bears N 47 W, 11 links distant, and a W. Oak 26 ins. diam. bears S 9 E, 58 links distant.
- This mile, uneven land. Timber, Oak, Beech, Sugar, Maple &c. Soil middling - woods pretty open.

North, between Sections 23 and 24.

- 16.86 A Gum 12 ins. diam.
- 47.86 A Gum 12 ins. diam.
- 56.00 A brook 8 links wide - Course West.
- 60.37 A W. Ash 14 ins. diam.
- 80.00 Set post corner of Sections 17, 18, 23, 24, from which an Elm 24 ins. diam. bears N 3 W, 21 links distant, and a Sassafras 12 ins. diam. bears S 8 W, 20 links distant.

Ch. 16.

This mile, uneven land - Timber, Oak, Beech, Sugar, Maple, Gum &c. Some stony. Soil middling - Open woods.
Quit for the day, October 15th, 1803.

Sunday, October 16. 1803.

- West, between Sections 17 and 24.
- 30.00 On rocky North side hill, to bottom.
- 36.00 A brook 10 links wide - Course N. W.
- 40.00 Set temporary half Section post.
- 43.50 A brook 20 links wide - Course S 70 W.
- 59.00 A drain - Course South.
- 62.50 A drain - Course S. E.
- 65.00 Along run bottom to foot of hill. The bottom about 7 or 8 chains wide - Good meadow land.
- 80.00 Set Temporary post.
- The last 15 chains, East side hill. Oak timber, thin soil, and stony.
- West, on South Boundary of Section 24.
- 10.70 High ledge of rocks
- 21.50 A brook 6 links wide - Course South.
- 39.00 Over stony hills, to bottom.
- 40.00 Set post corner of half Sections 47 and 48, from which an Elm 18 ins. diam, bears N 5 E, 10 links distant, and a W. Ash 7 ins. diam, bears S 26 E, 10 links distant.
- 41.00 To the bend of a run - Course S. W.
- 46.50 South end of a pond.
- 69.50 Across bottom, to Kill-buck Creek, 150 links wide - Course South. Dead water.
- 76.00 An old post.
- 80.00 Set post on a Laurel and rocky North side hill, corner of Sections 24 and 25, from which a B. Oak 14 ins. diam, bears East, 19 links distant, and a Gum 9 ins. diam, bears N 73 W, 17 links distant.
- The last 10 chains, poor stony land - The bottom, good meadow land. Timber, Elm &c.

Chs. 1/2

West, on South Boundary of Section 25.

40.00 on rocky North side hill - Poor land - Much Laurel undergrowth. Set post corner of half Sections 49 and 50, from which a W. Oak 12 ins. diam., bears West, 3 links distant, and a W. Oak 8 ins. diam., bears N 19 E, 19 links distant.

76.30 To the old Township corner, which is a Hickory 14 ins. diam. Marked per plan.

This East half mile, run bottom and North side hill. Timber, Gum, Maple, Elm, Hickory, Oak &c.

North, on West Boundary of Section 25.

2.00 A run 12 links wide - Course East.

35.60 A run 3 links wide - Course East.

76.80 Bent's post - No notches.

80.00 Set post corner of Sections 16 and 25, from which a W. Oak 30 ins. diam., bears N 40 E, 17 links distant, and a W. Oak 20 ins. diam., bears S 34 E, 45 links distant.

This mile, generally on foot of East side hill, near the creek bottom - Middling soil - Timber, Oak and Hickory.

North, between Sections 24 and 25.

9.50 A Poplar 30 ins. diam.

16.00 Killbuck creek - Course S 70 E - Gentle current.

17.00 Across the creek.

19.00 A brook 20 links wide - Course West.

31.25 A B. Ash 18 ins. diam.

45.45 A Hickory 28 ins. diam.

56.00 Across bottom.

60.50 A W. Oak 24 ins. diam.

80.00 Set post corner of Sections 16, 19, 24, 25, from which a W. Oak 14 ins. diam., bears N 20 W, 14 links distant, and a Beech 9 ins. diam., bears S 22 E, 35 links distant.

This post stands 38 links North and 20 links West of Temporary post set on East and West line.

This mile, the bottom on Killbuck Creek, generally

Ch. Sta.

low and swampy - The hill land poor and stony.

West, between Sections 16 and 25.

36.00 Over poor brushy hills - Lumber, Oak. Very rocky, to Killbuck Creek, 150 links wide - Course S 20 E.

40.00 Set temporary half Section post.

46.60 Intersected the west Boundary of this Township 80 links S. of post.

This mile, last half, poor thickety bottom - Aspen thickets.

East, corrected, between Sections 16 and 25.

Blazed the true line, and set post corner of half Sections 31, 32, 49, 50, from which a Lymn 16 ins. diam., bears S 26 W, 25 links distant, and a Lymn 16 ins. diam., bears S 58 E, 20 links distant.

North, between Sections 16 and 17.

2.60 A W. Oak 24 ins. diam.

38.25 A W. Oak 36 ins. diam.

49.00 A W. Oak 24 ins. diam.

74.00 A brook 4 links wide - Course S. W.

80.00 Set post corner of Sections 14, 15, 16, 17, from which a B. Oak 18 ins. diam., bears S 77 W, 7 links distant, and a W. Oak 20 ins. diam., bears N 30 E, 35 links distant.

This mile, poor brushy and rocky hills. Lumber, Oak. Very brushy with Oak and Hickory brush.

East, corrected, between Sections 17 and 24.

Blazed the line, and set post corner of half Secs. 33, 34, 47, 48, from which a Sugar 20 ins. diam., bears N 62 E, 3 links distant, and an Elm 13 ins. diam., bears N 33 W, 35 links distant.

Monday, October 17, 1803.

West, between Sections 18 and 23.

Ch. Sta	
24.00	A brook 8 links wide - course S. W.
24.70	A drain - Course S. W.
40.00	Set temporary half Section post.
79.60	Intersected North and South line 30 links North of post. This mile, low ridges - Good soil - Lumber, Beech, Oak, Hickory, Gum & Dogwood and some Spice, undergrowth.
North,	between Sections 18 and 19.
13.60	A B. Oak 30 ins. diam.
25.55	A W. Oak 20 ins. diam.
47.00	A brook - links wide - course West - Dry.
56.50	A W. Oak 30 ins. diam.
80.00	Set post corner of Sections 12, 13, 18, 19, from which a Hickory 14 ins. diam. bears S 42 $\frac{1}{2}$ W. 2 links distant, and a B. Oak 8 ins. diam. bears N 56 E. 34 links distant. (This mile, low ridges - Middling soil. Lumber, Oak, Hick- ory, Chestnut - Dogwood undergrowth - Some stony.
East,	Corrected the line between Sections 19 and 22. Blazed the line, and set post corner of half Sections 37, 38, 43, 44, from which a B. Oak 12 ins. diam. bears N 47 W. 27 links distant, and a B. Oak 10 ins. diam. bears S 32 W. 20 links distant.
West,	between Sections 20 and 21.
8.00	A brook 6 links wide - course South.
40.00	Set temporary half Section post.
56.00	A brook 15 links wide - Course South.
80.50	Intersected North and South line 40 links South of post. This mile, ridge land - Poor soil - Oak timber - Very stony and rocky.
East,	corrected, between Sections 20 and 21. Blazed the line, and set post at average measure, corner of half Sections 39, 40, 41, 42, from which a W. Oak 24 ins. diam. bears N 7 E. 25 links distant, and a W. Oak 10

Ch. Lk.

ins. diam., bears S 67 W, 10 links distant.

North, between Sections 19 and 20.

10.54 A W. Oak 20 ins. diam.

23.34 A W. Oak 30 ins. diam.

38.10 A brook 8 links wide - Course S 60 E - Stony.

52.00 A drain - bourse East.

54.90 A Maple 12 ins. diam.

72.20 A brook 10 links wide - Course S 60 E.

80.00 Set post corner of Sections 11, 12, 19, 20, from which a W. Oak 16 ins. diam., bears N 23 W, 12 links distant, and a W. Oak 14 ins. diam., bears S 40 1/2 W, 22 links distant.

This mile, hill land - Poor, rocky and stony. Lumber, Oak, some Laurel, &c.

North, on East Boundary of Section 20.

, 40 Old one-mile post.

49.00 A drain - Course S. W.

80.00 Set post corner of Sections 11 and 20, from which a Hickory 14 ins. diam., bears N 41 W, 36 links distant, and a W. Oak 30 ins. diam., bears S 46 1/2 W, 37 links distant.

This mile, low ridges - Lumber, Beech, Oak, Maple and Hickory &c. Dogwood undergrowth - Soil some stony and thin.

West, between Sections 11 and 20.

19.50 A drain - Course S. W.

40.00 Set Temporary half Section post.

54.00 A run 8 links wide - Course S. W.

66.60 A brook 12 links wide - Course South - 4 chains Bottom.

80.56 Intersected North and South line at post.

This mile, poor ridge land. Lumber, Oak, Hickory &c. Many rocks and stones.

East, Connected between Sections 11 and 20.

Blazed the line and set post at average measure, corner of half Sections 21, 22, 39, 40, from which a W. Oak 30 ins.

Ch. Lk.

diant, bears West, 6 links distant, and a W. Oak 18 ins. diant.
bears S 6½ E, 30 links distant.

West, between Sections 12 and 19.

19.00 A brook 10 links wide - course S 40 E.

24.00 Bend of same brook - comes from the N. W.

49.50 Intersected the North and South line 34 links North of post.
This mile, stony ridges - Poor soil. Oak timber.

East, corrected, the line between Sections 12 and 19.

Placed the line, and set post at average measure, corner
of half Sections 23, 24, 37, 38, from which a Maple 12 ins.
diant, bears N 55½ E, 10 links distant, and a W. Oak 14 ins.
diant, bears S 57 E, 17 links distant.

North, between Sections 11 and 12.

22.00 A brook 3 links wide - course East.

27.40 A W. Oak 26 ins. diant.

35.80 A brook 10 links wide - Course S. E.

40.50 A rocky drain - course West.

48.22 A W. Oak 20 ins. diant.

65.00 A brook 4 links wide - Course S. W.

72.20 A Gum 12 ins. diant.

80.00 Set post corner of Sections 9, 10, 11, 12, from which a Hickory
28 ins. diant, bears S 55 E, 5 links distant, and a Maple
12 ins. diant, bears N 50½ W, 22 links distant.

This mile, poor stony hills - Timber, Oak, Hickory,
Maple, and Dogwood and Laurel undergrowth.

East, between Sections 18 and 23, on true line.

Set post corner of half Sections 35, 36, 45, 46, at average
measure, from which a W. Oak 16 ins. diant, bears N 3 W, 13
links distant, and a B. Oak 24 ins. diant, bears S 40 W, 49
links distant.

West, between Sections 13 and 18.

Ch. Lk.

40.00 Set temporary half section post.

45.00 A rocky run - Course S 20 W.

80.00 Set temporary post.

This mile, poor stony ridges. Lumber, Oak, Hickory, Chestnut & Maple, and Dogwood undergrowth. Many rocks and stones. Open woods. Quit for the day, October 17th, 1803.

Tuesday, October 18th, 1803.

North, between Sections 17 and 18.

13.54 A W. Oak 18 ins. diam.

19.50 A brook 15 links wide - Course S. W. 5 chains Bottom.

24.80 A Beech 15 ins. diam.

34.50 A drain - course East - Rocky.

59.46 A W. Oak 40 ins. diam.

70.10 A brook 10 lbs. wide - Course S. E.

80.00 Set post corner of Sections 13, 14, 17, 18, from which a W. Oak 34 ins. diam., bears N 51 W, 15 links distant, and a Maple 7 ins. diam., bears S 52 1/2 E, 24 links distant.

This mile, poor stony ridges. Lumber, Oak, Beech, Maple, and Hickory - Very rocky - Dogwood, Oak and Hickory, undergrowth.

This post stands 40 links South and 63 links East of temporary post.

East, Corrected, between Sections 13 and 18.

Blazed the line, and set post corner of half Sections 25, 26, 35, 36, at average measure, from which a Sugar 16 ins. diam. bears N 30 W, 4 links distant, and a W. Oak 18 ins. diam. bears S 2 E, 10 links distant.

North, between Sections 12 and 13.

4.92 A Poplar 20 ins. diam.

29.25 A drain - Course S. E.

33.10 A Poplar 20 ins. diam.

45.00 A W. Oak 30 ins. diam.

71.53 A Hickory 18 ins. diam.

Ch. 161

73.20 A drain - Course S. W.

80.00 Set post corner of Sections 8, 9, 12, 13, from which a B. Oak 16 ins. diam., bears S 64 E, 28 links distant, and a Chestnut 18 ins. diam., bears N 64 1/2 W, 40 links distant.

This mile, low ridges - Stony, and poor soil - Lumber, Oak and Chestnut.

North, on East Boundary of Section 11.

.30 Old Mile post.

1.00 A drain - Course East.

5.30 A drain - Course S. E.

24.00 A run 4 links wide - Course N. E.

40.30 Old Section corner of Quarter Townships.

64.00 A run 3 links wide - Course East.

74.00 A run 10 links wide - Course S. E. Line keeps up the run.

80.00 Set post corner of Sections 10 and 11, from which a Sugar 14 ins. diam., bears S 39 N, 9 links distant, and a Sugar 14 ins. diam., bears S 31 E, 14 links distant.

This mile, ridge land. Some stony - Lumber, Oak, Hickory, Gum & Maple - Dogwood undergrowth.

West, between Sections 10 and 11.

1.00 A brook 10 links wide - Course S. E.

40.00 Set temporary half Section post.

46.80 A brook 6 links wide - Course South.

72.40 A brook 4 links wide - Course S. W.

80.42 Intersected the North and South line 30 links North of post.

This mile over poor stony ridges. Lumber, Oak, Hickory and Chestnut - Dogwood and Hickory undergrowth.

West, between Sections 9 and 12.

34.00 A brook 8 links wide - Course S 30 E.

40.00 Set temporary half Section post.

79.08 Intersected North and South line 56 links South of post.

This mile, ridge land - Thin stony soil. Lumber, Oak, Hickory, Maple or Rocky in places.

6th Lk^s

East, corrected, between Sections 9 and 12.

Blazed the line, and set post corner of half Sections 17, 18, 23, 24, at average measure, from which a W. Oak 30 ins. diam. bears 85 E, 41 links distant, and a W. Oak 12 ins. diam. bears S 67 W, 42 links distant.

East, corrected, between Sections 10 and 11.

Blazed the line, and set post corner of half Sections 19, 20, 21, 22, at average measure, from which a Maple 12 ins. diam. bears S 88 E, 30 links distant, and a Beech 14 ins. diam. bears S 38 W, 53 links distant.

North, on East Boundary of Section 10.

, 40 Old mile post.

18, 00 Leave the run, which comes from N. W.

74, 30 A brook 4 links wide - course S. W.

80, 00 Set post corner of Sections 1 and 10, from which a B. Oak 20 ins. diam. bears S 10 W, 13 links distant, and a Beech 12 ins. diam. bears N 65 W, 27 links distant.

This mile, ridge land. Thin, stony soil. Timber, Oak, Beech, & Hickory. Rocky and stony.

North, between Sections 9 and 10.

8, 40 A W. Oak 18 ins. diam.

23, 56 A Beech 12 ins. diam.

48, 41 A Hickory 14 ins. diam.

74, 50 A drain - course N. E.

80, 00 Set post corner of Sections 1, 2, 9, 10, from which a Maple 16 ins. diam. bears N 65 E, 11 links distant, and a Maple 14 ins. diam. bears N 74 1/2 W, 22 links distant.

This mile, stony, poor ridges. Timber, Oak, Hickory, Gum, Maple, Chestnut &c.

West, between Sections 1 and 10.

5, 10 A drain - course South - deep gully.

25, 00 A drain - course South.

Ch. 100

40.00 Set temporary half Section post.

65.00 A brook 10 links wide - course West.

73.00 Leave the run - flows N. W.

76.00 A drain - course N. E.

79.80 Intersected North and South line at post.

This mile, poor stony hills, and rocky - Timber, Beech
Oak and Hickory.

East, corrected the line between Sections 1 and 10.

Placed the line, and set post corner of half Sections
1, 2, 19, 20 at average measure, from which a W. Oak 20 ins.
diamt. bears S 71 E, 12 links distant, and a W. Oak 26 ins.
diamt. bears N 12 E, 22 links distant.

West, between Sections 2 and 9.

28.00 A drain - course N. W.

29.30 A drain - course North.

40.00 Set temporary half Section post.

46.50 A brook 6 links wide - course North.

80.00 Set Temporary Section post.

This mile, poor stony hills - Timber, Oak, Beech and Maple.
Dogwood undergrowth.

West, between Sections 8 and 13.

38.50 A brook 8 links wide - course North.

40.00 Set Temporary half Section post.

80.00 Set Temporary Section post.

This mile, poor stony ridges. Timber, Oak and Chestnut.
Dogwood and Sassafras undergrowth. Some Poplar and
Maple timber - Soil poor - Quit for the day, October 18th, 1808.

West, between Sections 14 and 17.

5.00 A drain - course S. W.

8.50 A brook 8 links wide - course South. 4 chains bottom.

40.00 Set temporary half Section post in a drain - Course S. E.

75.50 A brook 4 links wide - Course S. W.

64^h Lk^s

80.00 Intersected at the post.

This mile, poor, stony hills - Timber, Oak, Hickory, Beech, Maple and some Chestnut - Dogwood undergrowth. Soil thin.

North, between Sections 14 and 15.

21.94 A W. Oak 24 ins. diam.

39.50 A W. Oak 24 ins. diam.

55.25 A drain - Course West.

76.00 A brook 6 links wide - Course S 70 W.

77.40 A W. Oak 26 ins. diam.

80.00 Set post corner of Sections 6, 7, 14, 15, from which a W. Oak 30 ins. diam., bears N 45 W, 1 link distant, and a W. Oak 18 ins. diam., bears S 21 E, 6 links distant.

This mile, high ridge - stony soil. Timber, Oak, Beech, Hickory and some Chestnut. Dogwood and some Beech undergrowth.

West, between Sections 15 and 16.

10.50 A drain - Course S. W.

35.00 On top of Kill buck creek hill.

40.00 Set temporary half Section post.

47.00 Down rocky hill, to bottom.

65.50 Over Beech timbered bottom, to Kill buck creek, 150 links wide - Course South West - Gentle current.

76.00 Intersected West Boundary of this Township, 10 links North of Bent's post. Set temporary post, until I run North on West Boundary of Section 16.

This mile, the hill, poor and rocky - The bottom slashy and poor.

East, corrected, between Sections 15 and 16.

After intersecting from the South, I blazed the line between Sections 15 and 16, and set post corner of half Sections 29, 30, 31, 32 on true line, from which a W. Oak 14 ins. diam., bears S 32 1/2 E, 8 links distant, and a Beech 10 ins. diam.

Ch. Lk.

bears N 23 W. 17 links distant.

North, on West Boundary of Section 16.

24.20 A brook 8 links wide - course East.

60.00 Killbuck brook, 200 links wide - course N 70 E - Gentle current.

78.00 To Killbuck Creek - Course West.

This mile, before we came to the creek, near the foot of the hill, very brushy and some slashy - Timber, Oak, Elm &c. Since we came to the creek, Beech timbered bottom.

80.00 Intersected at post, and set post corner of Sections 15 and 16, from which a W. Ash 12 ins. diam. bears S 29 1/2 E. 8 links distant, and a Hickory 8 ins. diam. bears S 87 W. 8 links distant.

North, on West Boundary of Section 15.

3.50 The line goes up a point of hill.

16.50 Over hill to a creek - Course S. E. [Killbuck brook.]

20.50 Across Creek.

41.00 Old Section corner of Quarter Townships.

43.25 Killbuck brook, 200 links wide - Course S. W. Gentle current.

47.50 A creek - Course S. E.

78.10 Bent's post - To this point, the line is generally in the creek.

80.00 Set post corner of Sections 6 and 15, from which a Sugar 20 ins. diam. bears N 49 1/2 W. 30 links distant, and an Elm 15 ins. diam. bears S 26 1/2 E. 41 links distant.

This mile, bottom.

North, on West Boundary of Section 6.

4.50 To Killbuck brook.

11.00 Out of Creek on the same side.

19.00 The brook, Course S. E.

29.00 Out on the same side - Comes from N. E.

45.70 A brook 25 links wide - Course East.

61.00 Across bottom - Rise a point of hill.

78.70 Bent's post.

Ch. Sta.	
80.00	Set post corner of Sections 5 and 6, from which a Beech 18 ins. diamt. bears S 50 $\frac{1}{2}$ E, 50 links distant, and a Beech 12 ins. diamt. bears N 39 $\frac{1}{2}$ E, 42 links distant. This mile, mostly bottom land. Some slashy - Timber, Hickory, Elm, Ash, Swamp Oak &c. The hill, poor land - Timber, Oak and Ash &c.
	West, between Sections 6 and 15.
40.00	Set Temporary half Section post.
76.05	Intersected the West Boundary of this Township, 5 links South of post. This mile, poor stony hills - Timber, Oak.
	East, corrected, between Sections 6 and 15. Placed the line, and set post corner of half Sections 11, 12, 29, 30, from which a W. Oak 16 ins. diamt. bears S 27 W, 17 lks. distant, and a Beech 12 ins. diamt. bears N 3 W, 26 links distant. Quit for the day, Wednesday, October 19th, 1803.
	Thursday, October 20th, 1803.
	East, corrected, between Sections 14 and 17. Placed the line, and set post corner of half Sections 23, 34, 27, 28, from which a Beech, 10 ins. diamt. bears S 22 W, 43 lks. distant, and a Beech 12 ins. diamt. bears N 15 E, 31 links distant.
	North, between Sections 13 and 14.
6.00	A brook 4 links wide - Course West.
15.12	A W. Oak 16 ins. diamt.
27.00	A drain - Course West.
28.78	A W. Oak 12 ins. diamt.
45.00	A drain - Course S. W.
54.58	A W. Oak 20 ins. diamt.
80.00	Set post corner of Sections 7, 8, 13, 14, from which a B. Oak 24 ins. diamt. bears S 33 E, 30 links distant and a Poplar 30 ins. diamt. bears S 77 W, 28 links distant.

Ch. Lk.

This mile, poor brushy hills - Lumber, Oak, Hickory and some Chestnut.

This post stands 35 links South and 70 links East of Temporary post on the East and West line.

West, between Sections 7 and 14.

27.50 A brook 8 links wide - Course N 20 E.

40.00 Set Temporary half Section post.

69.00 A high ledge of rocks.

73.50 A drain - Course S. W.

80.20 Intersected North and South line 5 links South of post.

This mile, poor brushy hills - Very stony - Lumber, Oak, Hickory and Chestnut.

North, between Sections 7 and 8.

7.66 A W. Oak 30 ins. diam.

23.65 A Beech 12 ins. diam.

30.00 Down a rocky hill, to bottom.

42.00 A W. Oak 24 ins. diam. On the bank of Killbuck Creek 150 links wide - Course West - Gentle current. Swampy bottom.

52.30 Killbuck Creek - Course S. E.

57.50 Out of the Creek on the same side.

65.64 A Beech 12 ins. diam. - On rocky side hill.

78.80 A W. Oak 24 ins. diam.

80.00 Set post corner of Sections 3, 4, 7, 8, from which a Beech 12 ins. diam. bears S 50 E, 8 links distant, and a Beech 14 ins. diam. bears N 13 1/2 W, 43 links distant.

This mile, the bottom slashy - The hills, poor stony land, and rocks.

West, between Sections 4 and 7.

32.00 A drain - Course S. W.

38.00 A drain - Course N. W.

40.00 Set temporary half Section post.

58.20 A brook 10 links wide - Course S. E. - On edge of bottom.

64.25	Set temporary Section post. This mile, the hill land, poor and stony - the bottom, Beech timbered. The hills timbered with Oak, Hickory, Beech, Maple &c.
East,	connected, between Sections 7 and 14. Blazed the line, and set post corner of half Sections 13, 14, 27, 28, at average measure, from which a Beech 18 ins. diam. bears N 77 E. 25 links distant, and a Poplar 20 ins. diam. bears N 26 1/2 W. 31 links distant.
North,	between Sections 6 and 7.
4.50	A ledge of rocks.
8.15	A B. Oak 24 ins. diam.
20.60	A Chestnut 40 ins. diam.
43.20	A Poplar 30 ins. diam.
60.70	A drain - course N. E.
64.50	Over poor hills, to bottom.
70.00	To Kill buck creek - course S. W.
72.00	To the opposite bank of the creek - gentle current.
77.35	A Beech 12 ins. diam.
80.00	Set post corner of Sections 4, 5, 6, 7, from which an Elm 12 ins. diam. bears N 27 W. 8 links distant, and a B. Ash 14 ins. diam. bears S 11 W. 22 links distant. This mile, the hills poor and stony - the bottom, slashy. This post stands 5 links South and 43 links West of temporary post on East and West line.
West,	between Sections 5 and 6.
40.00	Set temporary half Section post.
56.00	Over poor swampy bottom, to hill.
75.45	Intersected West Boundary of this Township 20 links South of post. This mile, the hill poor and stony.
North,	between Sections 4 and 5.

ch^{rs} 211

- 10.64 A B. Ash 12 ins. diam.
- 17.00 Across bottom, to stony hill.
- 41.25 A Chestnut 16 ins. diam.
- 57.87 A W. Oak 24 ins. diam.
- 77.87 A Maple 15 ins. diam.
- 82.40 Intersected North Boundary of this Township, and set post corner of Sections 4 and 5, from which a B. Oak 20 ins. diam. bears S 79 E, 43 links distant, and a Beech 14 ins. diam. bears N 8 W, 22 links distant.

This mile, poor stony hills - Lumber, Oak, Beech, and much good Chestnut - Undergrowth, Dogwood and Sassafras.

West, on North Boundary of Section 5.

- 40.00 Set post corner of half Sections 9 and 10, from which, a Poplar 12 ins. diam. bears S 36 $\frac{1}{2}$ W, 23 links distant, and a Poplar 20 ins. diam. bears N 42 W, 19 links distant.
- 53.50 A brook 3 links wide - course South.
- 60.40 A brook 10 links wide - course S. E. 4 ch^{rs} good bottom.
- 75.00 To old Township corner, from which a Beech 24 ins. diam. bears S 39 E, 13 links distant, and a Beech 12 ins. diam. bears S 43 W, 17 links distant.

The first part of this mile, poor ridges. The last 15 chains rich side hill - Lumber, Elm, Beech, Sugar, Poplar and some Walnut.

North, on West Boundary of Section 5.

- 3.30 Old Four-mile tree.
- 22.50 A spring run 4 links wide - course N. W.
- 32.40 A drain - course West.
- 80.00 A drain - course N. E.
- 83.70 Old Township corner.

This mile, generally on the west side of ridge - First part of the mile, thin stony soil - The last 15 chains, very good ridge land. Lumber, W. Oak, B. Oak, Hickory & Spice and Dogwood undergrowth.

Ch. Lk.

East, corrected between Sections 5 and 6.
 Blazed the line, and set post corner of half Sections 9, 10, 11, 12, on true line, from which a W. Ash 18 ins. diam. bears S 13½ W, 21 links distant, and an Elm 14 ins. diam. bears S 83 W, 27 links distant.

East, corrected, between Sections 4 and 7.
 Blazed the line, and set post corner of half Sect. 7, 8, 13, 14 at average measure, from which a Sugar 14 ins. diam. bears N 65 E, 28 links distant, and a Sugar 12 ins. diam. bears S 44 W, 19 links distant. Quit for the day, October 20th, 1803.

Friday, October 21, 1803.

East, corrected, between Sections 8 and 13.
 Blazed the line, and set post corner of half Sections 15, 16, 25, 26, at average measure, from which a B. Oak 20 ins. diam. bears S 62 W, 19 links distant, and a Beech 24 ins. diam. bears N 47 E, 31 links distant.

North, between Sections 8 and 9.

26.66 A B. Oak 20 ins. diam.

29.20 A Gulley - Course N. E.

48.00 A brook 6 links wide - Course N. W.

53.20 A Poplar 30 ins. diam.

62.10 A Hickory 18 ins. diam.

80.00 Set post corner of Sections 2, 3, 8, 9, from which a W. Oak 30 ins. diam. bears S 67 W, 6 links distant, and a W. Oak 30 ins. diam. bears East, 20 links diam.

This mile mile, poor stony hills - Timber, oak, Hickory, some Chesnut, Poplar and Gum. Dogwood undergrowth.

This post stands 20 links South and 10 links East of temporary post.

North, between Sections 2 and 3.

7.12 A Chesnut 18 ins. diam.

17.50 Over stony hill to bottom.

C.H. L.P.

26.82 A Sugar 14 ins. diam.

32.80 A brook 12 links wide - course West.

46.50 A Hoop Ash 14 ins. diam. [The Hoop Ash is the Hack-berry.]

56.10 Kill buck creek 200 links wide - Course S. W. Gentle current.

61.46 A Hickory 14 ins. diam.

X
81.00 Intersected North Boundary of the Township 130 links East of post corner of Sections 22 and 23, T. 9, R. 7 - Set post at corner of Sections 2 and 3, from which a Maple 20 ins. dia. bears N 67 W, 13 links distant, and a B. Ash 12 ins. diam. bears S 40 E, 5 links distant.

This mile, poor hill and poor slashy bottom. Much wet ground. Timber, Beech, Elm, Ash, Maple &c.

West, between Sections 3 and 8.

25.00 Along on North side of a rocky hill, to bottom.

55.80 Bank of Kill buck creek - Course S 20 E.

57.00 Across creek.

62.00 Across bottom, to a hill.

79.50 Intersected the North and South line 104 links North of post.

This mile, the bottom poor and swampy - the hills very rough and stony.

North, between Sections 3 and 4.

10.94 A Beech 30 ins. diam.

15.25 A brook 6 links wide course N. E.

29.00 A drain - Course East.

32.12 A W. Oak 30 ins. diam.

39.56 A W. Oak 18 ins. diam.

54.25 A Beech 12 ins. diam.

63.00 A brook 12 links wide - Course S 70 E.

72.22 A Gum 14 ins. diam.

82.00 Intersected North Boundary of this Township, and set post corner of Sections 3 and 4, from which a Beech 20 ins. diam. bears S 81 W, 44 links distant, and an Elm 12 ins. diam. bears S 77 E, 30 links distant.

Ch. Lk.

This mile, poor rocky hills - Timber, Oak, Beech and Gum, with some Hickory, Poplar, Sugar &c.

West, on North Boundary of Section 4.

- .80 A drain - Course S. W.
 18.50 A rocky drain - Course South.
 29.00 A brook 10 links wide - Course S. E.
 51.00 A brook 4 links wide - Course North.
 65.00 A brook 4 links wide - Course North.
 76.00 Old bearing trees.
 80.20 To post, corner of Sections 4 and 5.

This mile, poor rocky hills - Timber, Oak, Hickory and hicknut, with Poplar and Sugar.

East, connected, on North Boundary of Section 4.

Set post at corner of half Sections 7 and 8 at average measure on true line, from which a Beech 16 ins. diam. bears S 85 E, 38 links distant, and a Poplar 7 ins. diam. bears N 27 W, 11 links distant.

East on old Township line, North Boundary of Section 3.

- 31.00 A brook 10 links wide - Course S. E.
 39.75 The average measure for half Section post - Set post corner of half Sections 5 and 6, from which a Gum 20 ins. diam. bears S 37 W, 38 links distant, and a White Oak 20 ins. diam. bears S 34 E, 67 links distant.

This half mile, hill land - middling soil - Timber, Oak, Hickory, Beech, Maple &c. Spice and Dogwood undergrowth.

East, connected, between Sections 3 and 8.

Blazed the line, and set post corner of half Sections 5, 6, 15, 16, from which a Beech 12 ins. diam. bears N 71 E, 6 links distant, and a Beech 10 ins. diam. bears S 54 W, 9 links distant.

East, connected, between Sections 2 and 9.

Blazed the line, and set post corner of half Sections 3, 4,

Ch. Sta.

17, 18, at average measure, from which a B. Oak 20 ins. diam.
bears S 47 W, 23 links distant, and a W. Oak 12 ins. diam.
bears S 49 E, 19 links distant.

North, between Sections 1 and 2.

3.80 A spring run - Course West.

6.50 A brook 12 links wide - Course West.

39.77 A Chestnut 18 ins. diam.

50.70 A W. Oak 36 ins. diam.

59.50 To a drain - Course West.

81.00 Intersected old line 20 links west of post - Set post, from
which an Elm 10 ins. diam. bears S 26 E, 9 links distant,
and a Sugar 10 ins. diam. bears S 40 W, 40 links distant.
This mile, poor hilly and stony land. Timber, Oak,
Beech &c.

West, on North Boundary of Section 2.

Set post corner of half Sections 3 and 4, at average measure,
from which a Sugar 10 ins. diam. bears S 80 E, 15 lks. distant,
and a W. Oak 24 ins. diam. bears S 31 W, 23 links distant.

North, on East Boundary of Section 1.

.50 An old post.

32.50 A run 3 links wide - Course N. E.

44.50 A brook 3 links wide - Course N. E.

80.70 To the old Township Corner - Marked per plan.

This mile, Chestnut and Oak timbered ridges. Poor stony
soil - Dogwood undergrowth.

West, on North Boundary of Section 1.

Set post corner of half Sections 1 and 2, from which a W.
Oak 18 ins. diam. bears N 5 W, 18 links distant, and a W.
Oak 24 ins. diam. bears S 58 W, 25 links distant - This post
is also corner of half Sections 41 and 42, T. 9, R. 7.

Surveyed in the year of Grace, 1803, by
E. Buckingham, Deputy Surveyor.