



Address: 5434 TR 377, Millersburg, OH 44654

Phone: 330.231.0497

Description: 9.941 Acres

Being part of Lot 3 of the First Quarter, Berlin Township, T-9 N, R-6 W, Holmes County, Ohio, also known as part of the lands of Martha M. Allen aka Martha Mitten Allen in O.R. Vol. 185 Page 910 Deed Vol. 235 Page 905, and Deed Vol. 210 Page 647 (PPN 0100526000, PPN 0100051000).

Described as follows:

Commencing at a railroad spike found marking the southwest corner of Lot 3, thence **N 00 degrees 14'52" W a distance of 604.74 feet** along the Lot line and the centerline of C.R. 207 to a point witnessed by an iron pin set **S 89 degrees 25'55" E a distance of 30.66 feet** being the TRUE PLACE OF BEGINNING.

Thence with the following **FOUR (4) COURSES**;

1. **N 00 degrees 14'52" W a distance of 468.86 feet** along the Lot line and the centerline of C.R. 207 to a point;
2. **S 89 degrees 25'55" E a distance of 925.12 feet** through the lands of said Martha M. Allen aka Martha Mitten Allen to an iron pin set and passing over an iron pin set at a distance of 33.11 feet;
3. **S 00 degrees 05'33" W a distance of 468.82 feet** through the lands of said Martha M. Allen to an iron pin set;
4. **N 89 degrees 25'55" W a distance of 922.34 feet** through the lands of said Martha M. Allen aka Martha Mitten Allen to the TRUE PLACE OF BEGINNING.


This parcel contains 9.941 acres and is subject to all highways, easements, and restrictions of record.

Bearings from Grid North, Ohio State Plane Coordinate System, North Zone, NAD 83(2011).


For survey see: Plat Book Vol. 19 Page 5766

All iron pins set are 5/8-inch rebars 30 inches long with a plastic identification cap marked "Galbraith 8703".

This survey was made and description prepared by Caleb Jerome Galbraith P.S. 8703
November 19, 2025.



Parcel Number: 0100051001

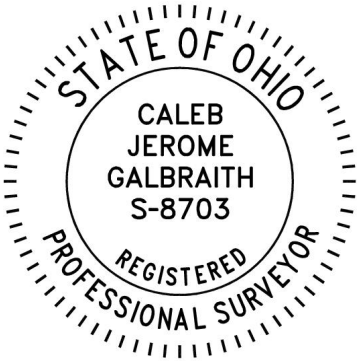

FILE DESCRIPTION

Holmes County Map Office
2/12/2026